

ETKD-N /ETWD-N

Single-jet dry-dial meter for cold and hot water

The ETKD-N/ ETWD-N is a single-jet meter with a 7- or 8-digit register with protected magnetic coupling. Prepared for a mechanical reed switch. The individual advantage of the ETKD-N/ ETWD-N is an exceptionally compact design. With its very small height, the meter easily adapts to any installation situation.

The ETKD-N/ ETWD-N guarantees reliable recording of meter data for individual consumption billing. Alternatively, the reed switch interface enables remote reading of the meter data via PDC via radio with LoRaWAN® or wM-Bus.



Performance characteristics at a glance

- Single jet dry-dial with shielded magnetic coupling
- For horizontal and vertical installation (also for riser- and downpipe application)
- All materials, which are used in the drinking water section, comply with the required standards, guidelines and the current German drinking water approval (other country-specific drinking water approvals on request)
- With 8-Rollers-Register and magnet pointer with 1L/pulse
Optional with 7-Rollers-Register and magnet pointer with 10L/pulse
- Register cap made of high-quality UV-resistant polymer plastic
- Protection cap can be retrofitted as an option
- Brass meter housing according to UBA (Federal Environment Office) list
- Register rotatable 355°
- Operating pressure MAP 16
- Approved in accordance with MID

Applications

- For the consumption measurement of cold and unpolluted drinking water or service water up to 30°C (ETKD)
- For the consumption measurement of hot and unpolluted drinking water or service water up to 90°C (ETWD)

AMR options


- Can be retrofitted with PDC module (PulseDataCapture):
 - PDC- wireless M-Bus radio module 868 MHz, according to EN 13757-4
 - PDC- LPWAN-radio module for LoRaWAN®
- Can be retrofitted with reed switch:
 - 1 L/pulse at 8-Rollers-Register
 - 10 L/pulse at 7-Rollers-Register

ETKD-N / ETWD-N


Technical data							
Permanent Flowrate	Q_3	m^3/h	1,6	2,5	2,5	2,5	4
Attainable measuring range	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Standard measuring range ¹	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Overload Flowrate ²	Q_4	m^3/h	2,00	3,125	3,125	3,125	5
Transitional Flowrate ²	Q_2	l/h	32H/64V	50H/100V	50H/100V	50H/100V	80H/160V
Minimal Flowrate ²	Q_1	l/h	20H/40V	31H/63V	31H/63V	31H/63V	50H/100V
Start-up flow rate	-	l/h	<10	<10	<10	<10	<14
Display range	min	l	0,02	0,02	0,02	0,02	0,02
	max	m^3	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99
Temperature range	-	$^{\circ}C$	0,1 - 30 30 - 90	0,1 - 30 30 - 90	0,1 - 30 30 - 90	0,1 - 30 30 - 90	0,1 - 30 30 - 90
Operating pressure	MAP	bar	16	16	16	16	16
Pulse value	-	l/Imp.	1/10	1/10	1/10	1/10	1/10
Pressure loss class at Q_3	Δp	bar	0,63	0,63	0,63	0,63	0,63
Mechanical environmental condition	-	-	M1	M1	M1	M1	M1
Climatic environment ³	-	$^{\circ}C$	5 - 70	5 - 70	5 - 70	5 - 70	5 - 70
Flow profile sensitivity	-	-	U0/D0	U0/D0	U0/D0	U0/D0	U0/D0

Dimensions and weights:							
Nominal diameter	DN	mm	15	15	15	20	20
		inch	1/2" (7/8") ⁴	1/2"	1/2" (7/8") ⁴	3/4"	3/4"
Overall length	L2	mm	110/115/130	80	110/115/130	110/130	130
Overall length with connectors approx.	L1	mm	190/195/200	160	190/195/200	190/226	226
Thread meter G x B	D1	inch	3/4"	3/4"	3/4"	1"	1"
Thread connector	D2	inch	1/2"	1/2"	1/2"	3/4"	3/4"
Width approx.	B	mm	66	66	66	66	66
Height approx.	H1	mm	77	77	77	80	80
Weight approx.	-	kg	0,43/0,44/0,46	0,42	0,43/0,44/0,46	0,54/0,57	0,57


¹ Other measuring ranges (R) on request
² The data refers to the standard measuring range
³ Condensation possible
⁴ Thread 7/8" on request
 Attention: not all versions are available in all markets

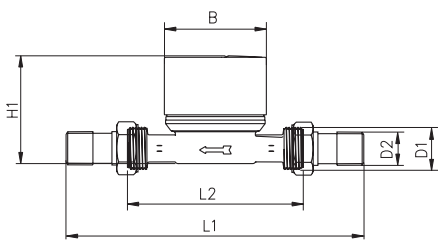

Dimensions

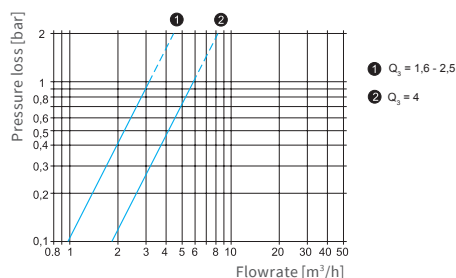

Pressure loss curve

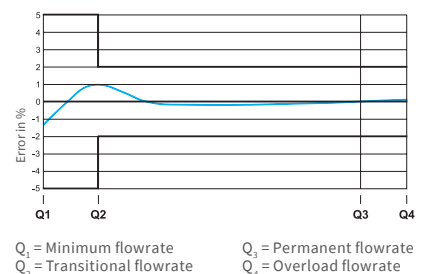

Typical error curve

Q_1 = Minimum flowrate
 Q_2 = Transitional flowrate
 Q_3 = Permanent flowrate
 Q_4 = Overload flowrate

ZENNER International GmbH & Co. KG

Heinrich-Barth-Straße 29 | 66115 Saarbrücken | Germany

Phone +49 681 99 676-30
 Fax +49 681 99 676-3100

E-mail info@zenner.com
 Internet www.zenner.com